
ONTARIO CONCRETE ACCESSORIES

Pin Lift Anchors

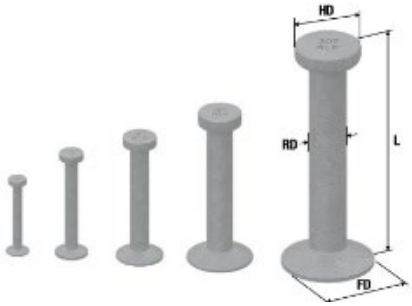

The Pin Lift Anchors are made using high strength steel with forged ends.

The head design provides uniform engagement with the Lifting Eye, and the large, forged anchor foot is embedded in the concrete to create the lifting capacity.
Standard finish is plain with galvanizing available.

DIMENSIONS						
-SAFE WORKING LOADS IN NORMAL CONCRETE-						
Ton	**L**	**1500 PSI**	**2500 PSI**	**3500 PSI**	**5000 PSI**	**Weight (lbs)**
2T	2-1/2” (65 mm)	1,050	1,400	1,800	2,150	0.30
2T	2-3/4” (75 mm)	1,375	1,775	2,100	2,510	0.31
2T	3-3/8” (85 mm)	2,000	2,700	3,250	3,900	0.35
2T	4-3/4” (120 mm)	3,250	4,000	4,000	4,000	0.44
2T	5-1/2” (140 mm)	4,000	4,000	4,000	4,000	0.49
2T	6-3/4” (170 mm)	4,000	4,000	4,000	4,000	0.57
4T	2-1/2” (65 mm)	1,400	1,810	2,150	2,560	0.67
4T	3” (75 mm)	1,960	2,530	2,990	3,570	0.74
4T	3-1/2” (85 mm)	2,275	2,938	9,475	4,150	0.77
4T	3-3/4” (75 mm)	2,500	3,300	3,900	4,700	0.82
4T	4-1/4” (100 mm)	3,100	4,000	4,750	5,700	0.89
4T	4-3/4” (120 mm)	3,750	4,850	5,750	6,850	0.94
4T	5-1/2” (140 mm)	4,700	6,000	7,200	8,000	1.05
4T	7-1/8” (180 mm)	7,300	8,000	8,000	8,000	1.25
4T	9-1/2” (240 mm)	8,000	8,000	8,000	8,000	1.60
8T	6-3/4” (170 mm)	7,000	9,000	10,780	12,850	2.50
8T	10” (250 mm)	14,790	16,000	16,000	16,000	3.45
16T	10” (250 mm)	15,300	19,500	23,400	27,950	7.10
16T	20” (500 mm)	32,000	32,000	32,000	32,000	7.50

Product specifications are subject to change without notice.