
ONTARIO CONCRETE ACCESSORIES

Two Hole Anchors

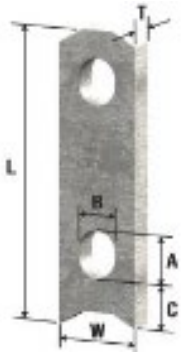

The Two Hole Anchors are used for stripping panels for tilt tables and handling panels.

The anchor is also appropriate for high tension loads that cannot be held with other anchors or panels constructed of light weight concrete.
The wider distribution of shear forces allows for the raising thin or low compressive strength panels.

DIMENSIONS						
Ton	**Ring Clutch Systems**	**Ult Mech Tension (lbs)**	**Weight (lbs)**	**Qty/ Crate**	**Min. Panel Thickness**	**Reinforced Tension Load**
2T	2T-3T	16,000	.45	5,000	2-3/4”	4,000
4T	4T-6T	32,000	1.23	1,800	4”	8,000
8T	8T-12T	64,000	3.04	500	5”	16,000
22T	12.5T-22T	176,000	11.46	200	7”	44,000

W	L	T	A	B	C
1-1/4”	4”	3/8”	¾”	9/16”	7/8”
1-1/2”	5-1/2”	5/8”	7/8”	11/16”	15/16”
2-1/2”	7”	¾”	1-3/16”	1”	1-7/16”
3-1/8”	11-3/4”	1-3/16”	1-13/16”	1-3/8”	2-7/16”

Product specifications are subject to change without notice.